



POWER-TRUST

THREE-PHASE SINGLE-PHASE [TS]

PREMIUM



Tower

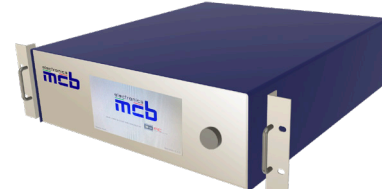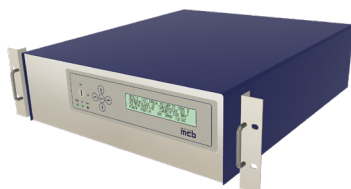

Rack 19"

Power	10 kVA	17.5 kVA	25 kVA
Transformer	No		
Full Load Efficiency	> 96%		
VOLTAGE			
Input Range [PH-PH]	350 – 440 Vac		
Output Ranges and Switch Mode [PH-N]	2 - 300 Vac		
Regulation System [PH-N]	Local [Potentiometer/Command Buttons]: 200-300Vac Remote [Interfaces]: 2-300Vac		
Sensing	No		
Total Harmonic Distortion (THD)	< 1%		
Static Line Regulation	< 1%		
Static Load Regulation	< 1%		
Dynamic stability of the output voltage upon load variation	< 0.5%		
Time Response to load or line variation	< 1 ms		
CURRENT			
Max Current Setup	Yes		
Regulation Function	Yes		
RMS	33 A	58,3 A	83,3 A
Inrush [6s]	49,5 A	87,5 A	125 A
FREQUENCY			
Input Range	47Hz - 63Hz		
Output (switchable)	50Hz and 60 Hz [± 0,001%]		
Additional Output Value (switchable)	400Hz [± 0,001%]		
Regulation Function (adjustable)	From 40Hz to 80Hz [± 1% with 4 x 40 LCD control panel] [± 0,001% with 7" LCD touch screen]		

Power	10 kVA	17.5 kVA	25 kVA
PHASES			
Offset Modulation		-	
OTHERS			
Crest factor	04:01		
Noise level	60dBA		70dBA
Power Protections	OVP, UVP, OCP, OTP		
CONTROL PANEL			
LCD Display	[4 x 40 characters]		
Voltage and current LCD Display accuracy	± 2 DIGIT		
Voltage and current LCD Display resolution	± 0.1		
Cos φ value visualization	Yes		
Frequency value visualization	Yes		
7" LCD Touch Panel Control	Optional		
COMMUNICATION INTERFACES			
0-10Vdc	Standard [Accuracy Response ± 1%]		
Serial Port RS232	RS232 or Ethernet. No both at the same time.		
Ethernet Port			
Communication Protocols	SCPI and LabView Drivers		
Reference Voltage of remote controls	Common ground with ground line		
MECHANICAL			
Plate Dimensions (L x H x D)	-	-	-
Plate Weight	-	-	-
Rack 19" Dimensions	6U D540 including 40mm handles	6U D540 including 40mm handles	-
Rack 19" Weight	24 kg	40 kg	-
Tower Dimensions (L x H x D)	-	550 x 1100 x 800 mm	550 x 1100 x 800 mm
Tower Weight	-	67 kg	80 kg
ENVIRONMENTAL			
Cooling	Forced Circulation		
Operating Temperature	from 0° to +40°C		
Storage Temperature	from -40° to +85°C		
REGULATORY			
Safety and EMC	CEI EN 62040-1, EN 62040-2, EN62040-3, EN 60950-1:2007-02		