


## POWER-BOOST

### SINGLE - PHASE [SS]

### PREMIUM

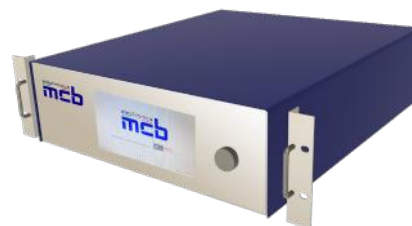

Rack 19"

Power	1.5 kVA	3 kVA	5 kVA	7.5 kVA
Transformer	Standard autotransformer - Optional isolation transformer			
Full Load Efficiency	> 93%			
<b>VOLTAGE</b>				
Input Range [PH-N]	190 - 267 Vac			
Output Ranges and Switch Mode [PH-N]	LOW 2-150Vac / HIGH 4-300Vac Manual and Automatic Switch LOW/HIGH through control panel			
Regulation System [PH-N]	Local [Command Buttons] and Remote [Interfaces]: 2-150Vac and 4-300Vac			
Sensing	Yes - (Maximum Voltage Drop 5%)			
Total Harmonic Distortion (THD)	< 1%			
Static Line Regulation	< 1%			
Static Load Regulation	< 1%			
Dynamic stability of the output voltage upon load variation	< 0.5%			
Time Response to load or line variation	< 1 ms			
<b>CURRENT</b>				
Max Current Setup	Yes			
Regulation Function	Yes			
RMS at 150Vac and 300Vac	10 A - 5 A	20 A - 10 A	33,3 A - 16,6 A	50 A - 25 A
Inrush at 150Vac and 300Vac [6s]	15 A - 7,5 A	30 A - 15 A	50 A - 25 A	75 A - 37,5 A
<b>FREQUENCY</b>				
Input Range	47Hz - 63Hz			
Output (switchable)	50Hz and 60 Hz [± 0,001%]			
Additional Output Value (switchable)	400Hz [± 0,001%]			
Regulation Function (adjustable)	from 40Hz to 80Hz [± 1% with 4 x 40 LCD control panel] [± 0,001% with 7" LCD touch screen]			

Power	1.5 kVA	3 kVA	5 kVA	7.5 kVA
<b>PHASES</b>				
Offset Modulation	-			
<b>OTHERS</b>				
Crest factor	04:01			
Noise level	60dBA			
Power Protections	OVP, UVP, OCP, OTP			
<b>CONTROL PANEL</b>				
LCD Display	[4 x 40 characters]			
Voltage and current LCD Display accuracy	± 2 DIGIT			
Voltage and current LCD Display resolution	± 0.1			
Cos φ value visualization	Yes			
Frequency value visualization	Yes			
7" LCD Touch Control Panel	Optional			
<b>COMMUNICATION INTERFACES</b>				
12 poles I/O	Standard [Accuracy Response ± 1%]			
Serial Port RS232	Yes			
Ethernet Port	Yes			
Communication Protocols	SCPI and LabView Drivers			
Reference Voltage of remote controls	Common ground with ground line			
<b>MECHANICAL (auto transformer / isolation transformer)</b>				
Plate Dimensions (L x H x D)	-	-	-	-
Plate Weight	-	-	-	-
Rack 19" Dimensions	3U D540 including 40mm handles	[3U D540] / [6U D540]	[3U D540] / [6U D540]	[3U D540] / [6U D540]
Rack 19" Weight	14 / 21 kg	18 / 27 kg	22 / 31 kg	29 / 44 kg
Tower Dimensions (L x H x D)	-	-	-	-
Tower Weight	-	-	-	-
<b>ENVIRONMENTAL</b>				
Cooling	Forced Circulation			
Operating Temperature	from 0° to +40°C			
Storage Temperature	from -40° to +85°C			
<b>REGULATORY</b>				
Safety & EMC	CEI EN 62040-1, EN 62040-2, EN62040-3, EN 60950-1:2007-02			